

COMBINED PROTECTION AGAINST BURGLARY AND FIRE AT HOME



# HOMESAFE S2 30P BURGLARY & FIRE-RESISTANT SAFE




## **KEY FEATURES**


- Combined fire and burglary protection in one safe.
- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes' fire protection for documents.
- · Choice of 6 models: from 11- to 91-litre capacity.
- Choice of locking options in all models: EN 1300 certified doublebitted key lock or EN 1300 certified electronic lock.
- Dual base fixing holes, supplied with two concrete anchor bolts.
- Ideal safe for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The safe door is secured using the new revolutionary "V" bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.
- The safe is prepared & anchoring kit is supplied to allow the HomeSafe S2 30P range to be securely base- or rear-fixed to resist unauthorised removal once installed.



# HOMESAFE S2 30P

# **PRODUCT SPECIFICATIONS**

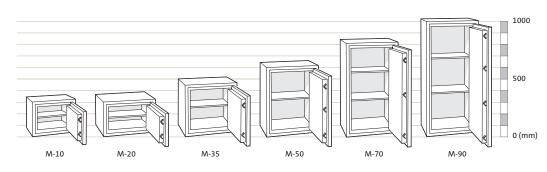



Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Width With Door Open 180° (B)	Depth With Door Open 90° (D)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-10	300	360	300	662	627	210	270	191	11	24	1
M-20	300	445	390	832	803	210	355	281	21	32	1
M-35	450	445	390	832	803	360	355	281	36	42	1
M-50	600	445	390	832	803	510	355	281	51	53	1
M-70	800	445	390	832	803	710	355	281	71	65	2
M-90	1000	445	390	832	803	910	355	281	91	78	2

\* Hinges project 20mm beyond the depth (C) given above. In standard electronic models, the overall projection increases to 30mm.

# LOCK OPTIONS



HomeSafe S2 30P safes can be fitted with either a key lock (Class A) or a high-security electronic lock (Class B). All locks are independently tested and are certified in accordance with the EN 1300 standard. The high-security electronic lock includes the following features, easily programmed by the owner:



- 1 master code and 1 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.

# CERTIFICATION

#### LFS 30P FIRE PROTECTION

The whole range has been certified by ECB•S in accordance with European Standard EN 15659 to provide 30-minute protection for documents in the event of a fire.

#### LEVEL S2 BURGLARY PROTECTION

All sizes have been certified by ECB•S in accordance with European Standard EN 14450 to burglary resistance Level S2.

### CONSTRUCTION

Both the walls and the door are constructed using an inner and outer layer of steel containing a specially formulated burglary and fire resistant material developed by Chubbsafes. This material provides class-leading performance with low weights enabling installation almost anywhere!

#### **COLOURS**

HomeSafe S2 30P comes standard in anthracite grey (RAL 7016) and is also available in light grey (RAL 7035) as a secondary option

Authorised dealer



Nolimal d.o.o. Cesta pogoro 42, 1353 Borovnica, Slovenija tel.: 01/754 83 60, fax: 01/754 83 61, www.nolimal.si; info@nolimal.si www.chubbsafes.com

